

Application/Use

Category	Lithium
Application	Backup
Warranty:	12



Specs & Dimensions

Model	LFP25.6V100AH G1	LFP25.6V100AH G2	LFP25.6V100AH G3
Nominal Voltage [V]	25.6		
Nominal Capacity [Ah]	100		
Total Energy [Wh]	2560		
Max. Charging Current [A]	100		
Recommended Charging Current [A]	50		
Charging Voltage [V]	28.4~29.2		
Max. Discharging Current [A]	100		
End of Discharge Voltage [V]	22.4		
Operating Temperature Range ⁽¹⁾	Charge: 0 ~ +50°C; Discharge: -20 ~ +55°C With optional heater parts: Charge/Discharge -20~+55°C		
Protection	Over charge, Over discharge, Over temperature, Low Temperature, Over Current, Short circuit		
Cycle Life ⁽²⁾	>3500 cycles		
Designed Calendar Life	10 Years		
Dimension (W*D*H, mm)	522*240*219		
Weight [Kg]	21.6		
Operation Humidity	0~95% RH (No condensing)		
Communication Port	/	/	RS485; CAN
LED Indicator and Button	/	SOC, ALM, RUN, ON/OFF	SOC, ALM, RUN, ON/OFF
IP Class	IP65	IP65	IP30
Parallel Support ⁽³⁾	Yes, Max. 4Sets	Yes, Max. 4Sets	Yes, Max. 4Sets
Series Support	Yes, Max. 2 Sets	Yes, Max. 2 Sets	Yes, Max. 2 Sets
Certification-Cell	UN38.3; ROHS; IEC62619; UL1973;		
Certification-Battery	UN38.3; MSDS; CE		
Optional Parts	Internal Bluetooth Module Heater Parts(100W)	Internal Bluetooth Module Heater Parts(100W)	Internal Bluetooth Module Heater Parts(100W) RS485-USB Device

Alrode

Deltec Energy Solutions
6 Liebenberg Street,
Alrode, Alberton, Johannesburg
South Africa

011 864 7930

sales@deltec.co.za

Cape Town

60 Marine Drive
Paarden Eiland, Cape Town

021 511 1001 | sales@deltec.co.za

Port Elizabeth

39 Drury Street North End
Port Elizabeth

021 511 1001 | sales@deltec.co.za

Pinetown

116 Josiah Gumede Road
Pinetown, Durban

031 702 4333 | sales@deltec.co.za

Nelspruit

Rapid Business Park, 10 Rapid Street
Riverside, Nelspruit

087 806 5876 | sales@deltec.co.za

George

112 Merriman Street
George CBD, George

044 001 0099 | etienne@deltec.co.za

BMS Detail Information

Over-Charge Alarm & Protection	
Over-Charge Alarm	3.55V (For cell) 28.4V (For pack)
Over-Charge Protection	3.7V (For cell) 29.6V (For pack)
Over-Charge Protection Delay	1000 ms
Over-Charge Release	3.45V (For cell) 27.6V (For pack)
Over-Discharge Alarm & Protection	
Over-Discharge Alarm	2.8V (For cell) 22.4V (For pack)
Over-Discharge Protection	2.5V (For cell) 20V (For pack)
Over-Discharge Protection Delay	1000 ms
Over-Discharge Release	2.8V (For cell) 22.4V (For pack)
Over Current Alarm & Protection	
Charge Over Current Alarm	105A
Charge Over Current Protection	110A
Charge Over-Current Protection Delay	15S
Charge Over Current Protection Release	Automatic release after 1min and up to 3 times or Discharge
Discharge Over Current Alarm	110A
Discharge Over Current Protection-1	120A
Discharge Over Current Protection-1 Delay	15S
Discharge Over Current Protection-2	180A
Discharge Over Current Protection-2 Delay	200ms
Discharge Over Current Protection Release	Automatic release after 1min and up to 3 times or Charge
Over Temperature Alarm & Protection	
Charge Low Temperature Alarm	7°C
Charge Low Temperature Protection	0°C
Charge Low Temperature Protection Release	5°C
Charge High Temperature Alarm	50°C
Charge High Temperature Protection	55°C
Charge High Temperature Protection Release	45°C
Discharge Low Temperature Alarm	-10°C
Discharge Low Temperature Protection	-20°C
Discharge Low Temperature Protection Release	-17°C
Discharge High Temperature Alarm	55°C
Discharge High Temperature Protection	60°C
Discharge High Temperature Protection Release	50°C
Short Circuit Protection	
Short Current Protection Delay Time	1500 uS
Short Current Release Method	Release load
Heater Control (for optional heater parts)	
Heater ON	Cell temperatures ≤ 0°C and charger is connected
Heater OFF	Cell temperature > 10°C

Alrode

Delttec Energy Solutions
6 Liebenberg Street,
Alrode, Alberton, Johannesburg
South Africa

011 864 7930

sales@delttec.co.za

Cape Town

60 Marine Drive
Paarden Eiland, Cape Town

021 511 1001 | sales@delttec.co.za

Port Elizabeth

39 Drury Street North End
Port Elizabeth

021 511 1001 | sales@delttec.co.za

Pinetown

116 Josiah Gumede Road
Pinetown, Durban

031 702 4333 | sales@delttec.co.za

Nelspruit

Rapid Business Park, 10 Rapid Street
Riverside, Nelspruit

087 806 5876 | sales@delttec.co.za

George

112 Merriman Street
George CBD, George

044 001 0099 | etienne@delttec.co.za

Safety

- + Long life type prismatic LiFePO4 cells.
- + Cell certification: UN38.3, ROHS, IEC62619, UL1973.
- + Battery certification: UN38.3, MSDS.
- + The cycle life over 3500 times.


Design

- + Detachable case, better than traditional case.
- + Case material ABS+PC, better and stronger than ABS case.
- + IP65 Class, water-proof design.
- + Maintenance free.

Battery Management System

- + Integrated BMS inside.
- + Independent protection for charge and discharge.
- + OVP, LVP, OCP, OTP, LTP, OTP, Short circuit protection.
- + Support LEDs indicators, Heater parts, Blue-tooth module.

Dimensions

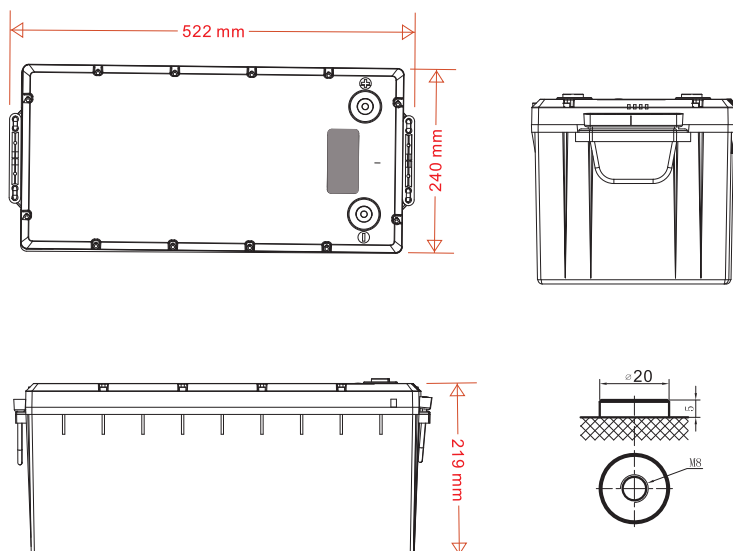

Unit: mm

Alrode

Deltec Energy Solutions
6 Liebenberg Street,
Alrode, Alberton, Johannesburg
South Africa

☎ 011 864 7930

✉ sales@deltec.co.za

Cape Town

60 Marine Drive
Paarden Eiland, Cape Town

☎ 021 511 1001 | ✉ sales@deltec.co.za

Port Elizabeth

39 Drury Street North End
Port Elizabeth

☎ 021 511 1001 | ✉ sales@deltec.co.za

Pinetown

116 Josiah Gumede Road
Pinetown, Durban

☎ 031 702 4333 | ✉ sales@deltec.co.za

Nelspruit

Rapid Business Park, 10 Rapid Street
Riverside, Nelspruit

☎ 087 806 5876 | ✉ sales@deltec.co.za

George

112 Merriman Street
George CBD, George

☎ 044 001 0099 | ✉ etienne@deltec.co.za